

Blending to gas mobile cart

To mix on-site each eco-friendly non-SF, dielectric gas mixtures


Enables easy transition to a clean insulation technology



- Precise mixing of up to 3 gases allows flexible customized mixtures while providing consistently accurate mixture concentrations.
- High flowrate and large dielectric volume management improve efficiency and productivity.

Blending to gas mobile cart - the answer for each of your non-SF₆ insulation needs.

ir Liquide's blending to gas mobile cart allows you to **blend automatically** and **efficiently** your **own non-SF**₆ **mixture** from 2 or 3 different **pure gases** from regular cylinders. For maintenance needs, it can also **recover** these mixtures from the gas-insulated high voltage compartments. Our **proven low-temperature heating** provides **high flowrate** filling and improved productivity.

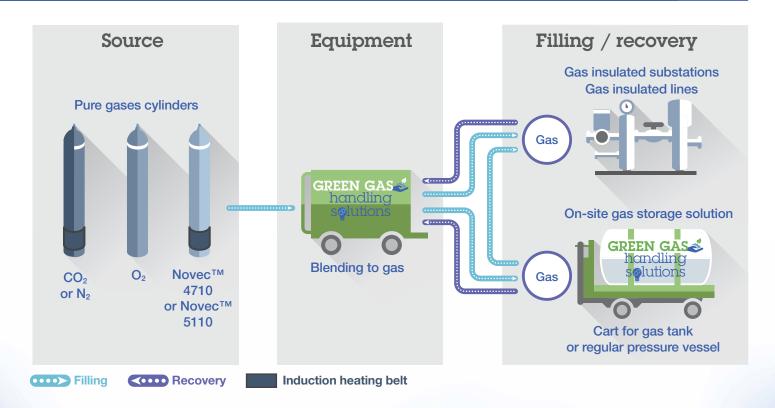

Technical characteristics

•Filling flow rate:	12 m ³ /h
• Ambient temperature of service:	-5°C to 50°C
•Storage temperature:	-20°C to 50°C
•GIS max filling pressure:	11 barg
•Storage tank max filling pressure:	20 barg
•Residual gas in the gas source:	1barg
Vacuum after recovery:	1mbarabs.
•Dimensions (LxWxH):	2.6mx1.3mx2m
•Weight:	1,500 kg

- Compatible gases: 3M[™] Novec[™] 4710, Novec[™] 5110, O₂, CO₂, N₂
- Mixture concentrations accuracy: 3% relative
- Equipment handling: pneumatic wheels, axle with pivoting drawbar, towing hook, park break, forklift pockets, 4 lifting hooks
- Electrical utilities: 50 Hz 400 VAC3 phases + neutral + ground 32 A
- •HMI (Human Machine Interface): fully automatic and ergonomic through a 12" touch screen
- •Certification: CE, overall IP33, Electrical part IP54

Related services

- Technical assistance
- Preventive and curative maintenance
- Spare parts
- Training



Contacts

Air Liquide Electronics Systems

8, rue Méridiens – Sud Galaxie 38130 Echirolles – France E-mail: frales-contact@airliquide.com www.ales.airliquide.com

www.airliquide.com

